

# HDTVI DIGITAL VIDEO RECORDER 04 CH



**Model No.** Z.CC.DV.04CH.HDTV71E1.01HG

## Features:

- Connectable to HD-TVI, analog cameras
- Connectable to the Coaxitron camera/dome with long transmission distance.
- Simultaneous HDMI and VGA outputs at up to 1920×1080P resolution.
- New GUI and support starting record with one key
- Redundant recording and holiday recording
- Instant playback for assigned camera during multi-channel live view mode
- Support up to 04-ch synchronous playback at 720P resolution; and reverse playback for multi-camera
- Smart playback to go through less effective information
- Manual video quality diagnostics
- Customization of tags, searching and playing back by tags
- Locking and unlocking record files
- Support HDD quota and group management; different capacity can be assigned to different cameras under quota mode
- Provide up to 1 SATA interfaces for recording
- Up to 1 self-adaptive 10M/100M/1000M network interface.
- Support DDNS (Dynamic Domain Name System). Network detection function.

## Specifications:

Z.CC.DV.04CH.HDTV71E1.01HG - 04 CH HDTVI DVR		
<b>Video/Audio input</b>	Video compression	H.264
	Analog and HD-TVI video input	4-ch BNC interface (1.0Vp-p, 75 Ω)
	Supported camera types	720P/25, 720P/30, CVBS
	Audio compression	G.711u
	Audio input / Two-way audio in	1-ch, RCA (2.0 Vp-p, 1 KΩ)
<b>Video/Audio output</b>	HDMI / VGA output	1920 × 1080 / 60 Hz, 1280 × 1024 / 60 Hz, 1280 × 720 / 60 Hz, 1024 × 768 / 60 Hz
	Encoding resolution	Main stream: 720P / WD1 / 4CIF / VGA / CIF Sub-stream: CIF / QVGA / QCIF
	Frame rate	Main stream: 1/16 fps ~ Real time frame rate Sub-stream: 1/16 fps ~ Real time frame rate
	Video bitrate	32 Kbps ~6 Mbps
	Audio output	1-ch, RCA (Linear, 1KΩ)
	Audio bitrate	64 Kbps
	Dual-stream	Support
	Stream type	Video, Video & Audio
	Synchronous playback	4-ch
	Playback resolution	720P / VGA / WD1 / 4CIF / CIF / QVGA / QCIF
<b>Network management</b>	Remote connections	128
	Network protocols	TCP/IP, PPPoE, DHCP, EZVIZ Cloud P2P, DNS, DDNS, NTP, SADP, SMTP, SNMP, NFS, iSCSI, UPnP™, HTTPS
<b>Hard disk</b>	SATA	1 SATA interface
	Capacity	Up to 6 TB capacity for each disk
<b>External interface</b>	Network interface	1; 10M / 100M self-adaptive Ethernet interface
	USB port	2 × USB2.0
<b>General</b>	Power supply	12V DC
	Consumption (without hard disks)	≤ 8W
	Working temperature	-10 °C ~ +55 °C (14 °F ~ 131 °F)
	Working humidity	10% ~ 90%
	Dimensions (W × D × H)	200 × 200 × 45mm (7.9 × 7.9 × 1.8 inch)
	Weight (without hard disks)	≤ 0.8kg / 1.8lb



Feel Safe

**Zicom Electronic Security Systems Ltd**

501, 5<sup>th</sup> Floor, Silver Metropolis, Goregaon (East), Mumbai – 400 063


| Phone +91-224-290-4290 | Fax +91-224-290-4291 | Toll Free 1800-270-4567 | Website [www.zicom.com](http://www.zicom.com) |

DSN: ZESSLsaaSZ1394ZCCDV04CHHDTV71E101HG

\* Product picture and technical specs subject to change without previous notice. All Rights Reserved with ZICOM.

# HDTVI DIGITAL VIDEO RECORDER 04 CH

## Physical Interface:

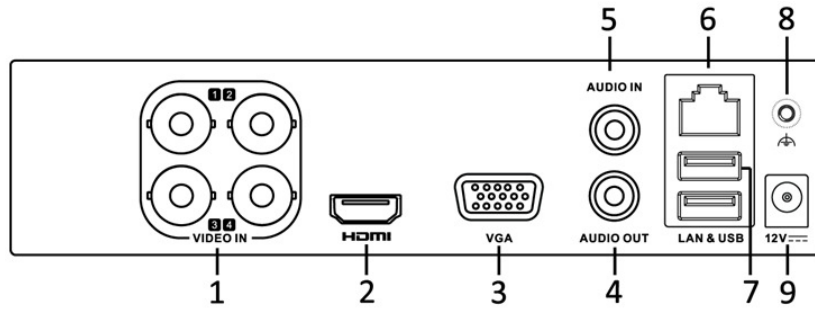

Index	Name
1	VIDEO IN
2	HDMI Interface
3	VGA Interface
4	AUDIO OUT, RCA Connector
5	AUDIO IN, RCA Connector
6	LAN Network Interface
7	USB Ports
8	GND
9	12VDC Power Input

## Typical Application:

